




SE-2G GPS Module

SE-2C GPS Module Digital Compass Enabled


Calibration Guide

for SE-2C compass-enabled GPS Module

- Install the SE-2C Module to the Ricoh 500SE Digital Camera (see overleaf).
- Hold the Camera with SE-2C Module attached in normal horizontal position; hold still.
- From the Menu select to 'Start Calibration': (MENU > EXP SET > COMPASS CALIBRATION > OK)
The 'Status LED' starts blinking.
- Turn the Camera one full turn (360°) on a level plane for approximately 30 seconds.

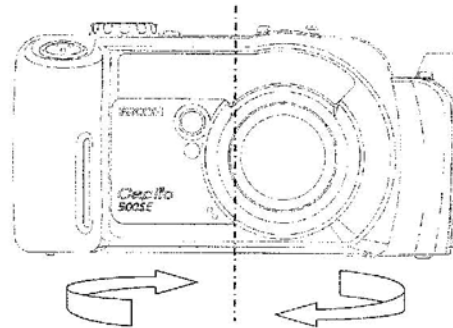

- Roll the Camera one full turn (360°) for approximately 30 seconds.
Rolling direction: the antenna of SE-2C Module should sequentially point up ... opposite direction from the user ... ground ... user ... up again .

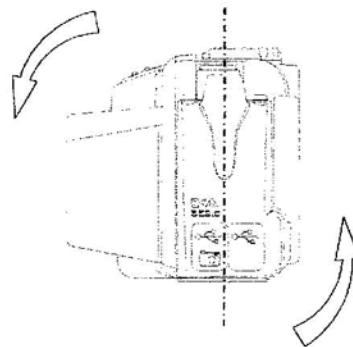

- Press 'DISP' button to stop calibration or wait for the Camera to stop calibration automatically.
The 'Status LED' starts blinking at a slower frequency.
- When the 'Status LED' stops blinking turn off the Camera. The Compass is now calibrated.